

REVIEW ARTICLE: HYBRID MATERIALS BASED ON CARBON NANOTUBES

Nguyen Cong Tu^{*}, Nguyen Huu Lam

*School of Engineering Physics, Hanoi University of Science and Technology, No 1, Dai Co Viet
street, Ha Noi*

^{*}Email: tu.nguyencong@hust.edu.vn

Received: 15 July 2016; Accepted for publication: 4 December 2016

ABSTRACT

Carbon nanotubes-based hybrid and composite materials, recently, are a hot topic in research about advanced materials. Nanotubes are functionalized and hybridized with both organic and inorganic compounds for designed applications. Hybrid materials can be fabricated by direct or in-direct method. Some investigations about electrical, optical and photocatalytic properties of hybrid materials would be discussed.

Keywords: CNT, hybrid material, metal oxide semiconductor.

1. INTRODUCTION

Since discovered by Iijima in 1991 [1], carbon nanotubes (CNTs), due to its outstanding electrical, mechanical properties, are one of the most attractive nanostructure materials in recent decades. Because of the limit of technology, CNT-based electronic devices, however, is only fabricated and tested in laboratory. To make the most of CNTs' outstanding properties for real applications, recently, researchers have given lot efforts to study CNT-based hybrid materials for real applications such as energy storage, supercapacitor, biosensor, gas sensor, cooling material... [2 - 20]. The CNTs-based hybrid material, for a designed application, was synthesized by corresponding method with the suitable functional material. This paper will give an overview of recent reports on developing CNTs-based hybrid materials.

2. CNT-BASED HYBRID MATERIALS

2.1. CNT-based hybrid materials: recent researches and potential applications

In studying about hybrid materials, researchers hope to combine the advantages of different components and widen the potential applications of materials. CNTs walls are inert with chemical reaction, so it is very hard to use in chemical or bio-application. To use CNTs in bio-application, ligands or functional organic agents were attached or covered on CNTs wall. These hybrid materials have both the large surface area, high conductivity of CNTs and the selectivity

of organic agents. Recently, A.L. Yost et al. functionalized CNT with organic ligands in microfluidic platform to selectively detect expected organic compound [2]. Using the conductivity and high efficiency of absorbing light of CNTs, Strano et al. combined MWCNT with chloroplast to enhance the photosynthesis efficiency of *Arabidopsis thaliana*'s leaf [3].

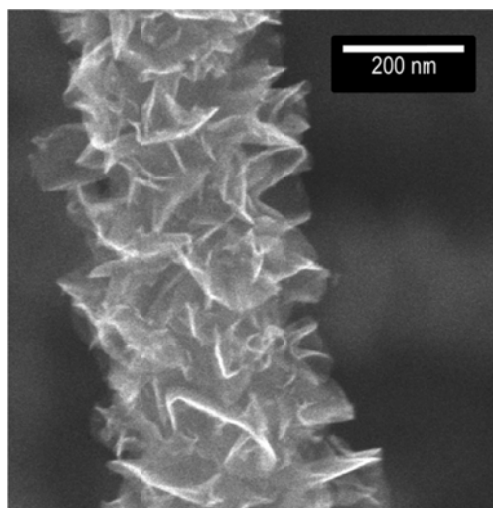


Figure 1. SEM image of foliate-like graphenated CNT [14] (Reprinted from [14] with permission of Cambridge University Press. Copyright © 2012 Cambridge University Press).

Also to use up the outstanding electric properties of CNT in energy storage application or supercapacitor, CNT is modified with graphene which has larger surface area and the same crystal structure with CNTs [12-16]. Figure 1 shows the foliate-like graphenated CNT, which was developed by C.B. Parker et al. to improve the operation of CNT-based capacitor [14]. Using the similar structure, Chen et al. aimed to enhance the performance of CNT-based electric and optoelectronic devices [15]. In these structures, researchers combined the high mobility of carriers in CNT with the high density of carrier in graphene's edge.

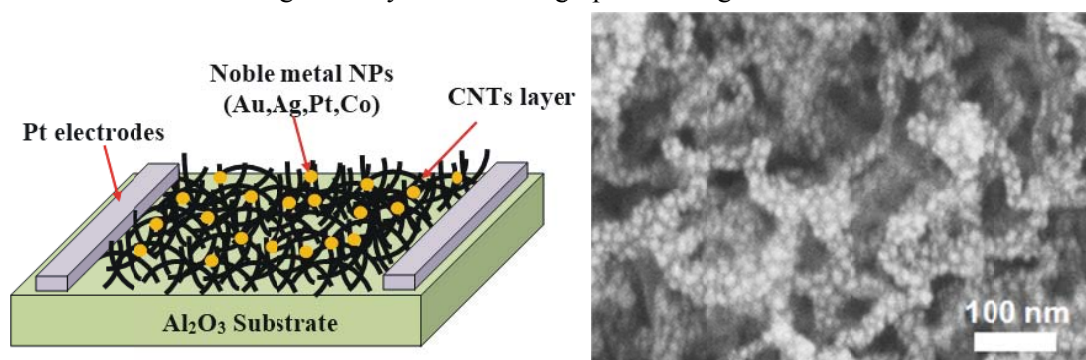


Figure 2. A diagram noble metal-decorated CNTs-based gas sensor device (left) and FESEM image of CNT layer coated with 4 nm Ag (right).

CNTs not only are modified with graphene which has similar structure with CNTs, but also are made composite with different nanostructures of metal [21 - 28], metal oxide semiconductor [29 - 36, 39 - 54], and pure/compound semiconductor [37, 38]. The remarkable advantage of

CNT-based materials is mostly showed in gas sensor application, photocatalytic activity. In Figure 2, there is a simple configuration of gas sensor using noble metal-coated CNT and the FESEM image of CNT layer coated with 4 nm Ag. By using Ag or Pt nanoparticles, N.H. Lam et al. clearly improved the NH₃ sensitivity of gas sensor (Figure 3) [27]. The similar results are observed in researches using the hybrid materials of CNT and metal oxide semiconductor nanostructures. N. V. Hieu et al. combined multi-walled CNTs (MWCNTs) with SnO₂ and ZnO nanostructures which showed the gas sensitivity at high temperature 500 °C [36].

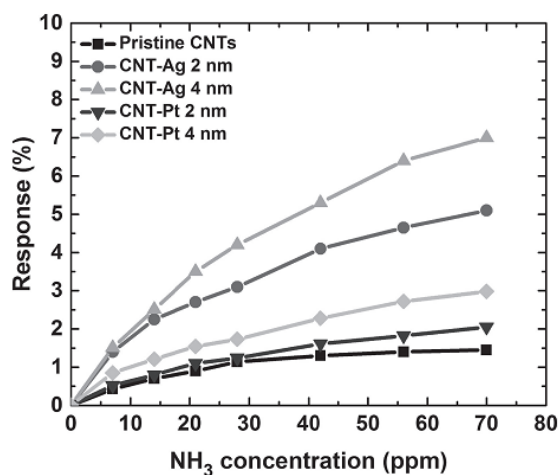


Figure 3. Comparison of responses of pristine CNT-, CNT/Pt- and CNT/Ag- based sensors under NH₃ gas concentration ranging from 0-70 ppm [27].

To utilize CNT for optical, electrical applications, CNTs have been mostly hybridised with nanostructures of semiconductor oxides, especially wide bandgap semiconductor oxides such as ZnO [31, 33, 39, 40], TiO₂ [41 - 48], WO₃ [48 - 54], SnO₂ [32, 36]... The wide bandgap semiconductor oxides such as ZnO (3.37 eV), TiO₂ (3.2-3.4 eV), WO₃ (2.4 - 3.2 eV) have been studied for a long time because of their distinguish properties, and their high potential in electronics, gas sensor, environmental controlling and recently in electrochromic applications [55 - 62]. ZnO, TiO₂, and WO₃, due to the lack of oxygen atom, are natural n-type semiconductors. In combination with CNT, they are hoping to create p-n junctions between CNT and semiconductor oxides.

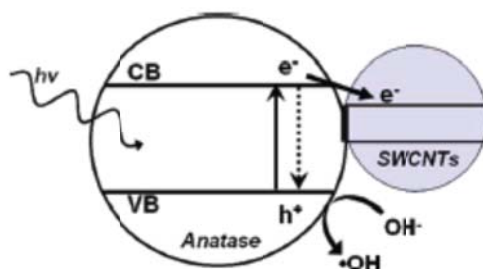


Figure 4. Schematic of a proposed model for SWCNT-enhanced photocatalysis of TiO₂ [43] (Reprinted with permission from [43]. Copyright © 2008 American Chemical Society).

Moreover, ZnO, TiO₂, and WO₃ are wide bandgap semiconductors with the bandgaps are closed to near UV range (~ 360 nm, 385 nm, 480 nm, respectively). Recently, the photocatalytic activities of TiO₂, WO₃ were investigated in degradation measurements with methylene blue and phenol with UV light. To enhance the photocatalytic activity of TiO₂ and WO₃, researchers combined them with CNTs [43-48]. Figure 4 illustrates the interaction between CNT and nanostructure of semiconductor oxides - TiO₂ in enhancement of photocatalytic activities. In this combination, researchers also hope to use the high efficiency of absorbing light of CNT to create photocatalytic materials which work properly with visible light.

2.1. Synthesis CNT-based hybrid materials

To synthesize CNT-based hybrid materials, there are two main methods. The 1st method is to mix the component with CNT in solution, then deposit the solution on substrate or interdigitated electrodes – the indirect method [19 - 26, 29 - 31]. In the 2nd method – direct method, CNT scaffold/net is grown on substrate, then functional component is deposited directly on as-grown CNT scaffold/net [27, 31 - 35, 39, 41]. J.M. Tulliani et al. used both two methods and concluded that the gas sensitivity of ZnO/CNT hybrid materials fabricated by 1st method is lower than the one fabricated by 2nd method. Moreover, with the 1st method, it is very hard to make the sustainable contact between hybrid material and substrate [31].

2.2. Characterizing CNT-based hybrid materials

In studying about CNT-based hybrid materials, questions about the role of each component and the interaction between components are still not answered clearly. To get more knowledge about these problems, some efforts have been made. Some groups used the XPS measurement [15, 31, 41], others used Raman microscopy [15, 18, 21, 29] to get the information from hybrid materials. M. Baro et al. used Raman spectroscopy to evaluate the effect of different nanoparticles on MWCNT [21]. In Figure 5, there are Raman spectra of pristine MWCNT and different metal/alloy/metal oxide semiconductor nanoparticles – coated MWCNTs. The ratio I_D/I_G of coated MWCNTs is higher than pristine MWCNT (I_D : the intensity of signal from disordered carbon; I_G : The intensity of signal from graphitic carbon). It is explained by the contact between nanoparticles and CNTs. These contacts act as defects on CNTs' walls, which results to increase the ratio of I_D/I_G .

To investigate the electric properties of hybrid materials, researchers used the impedance spectroscopy to evaluate the role of each component and effect of the interactions between components in hybrid materials [15, 34]. E. Llobet et al. built the equivalent circuit and measure the impedance spectrum of simple configuration sensor using plasma-treated MWCNTs. The resistance and capacitor of plasma-treated MWCNTs are used to examine the sensitivity of sensor with volatile organic compound [34].

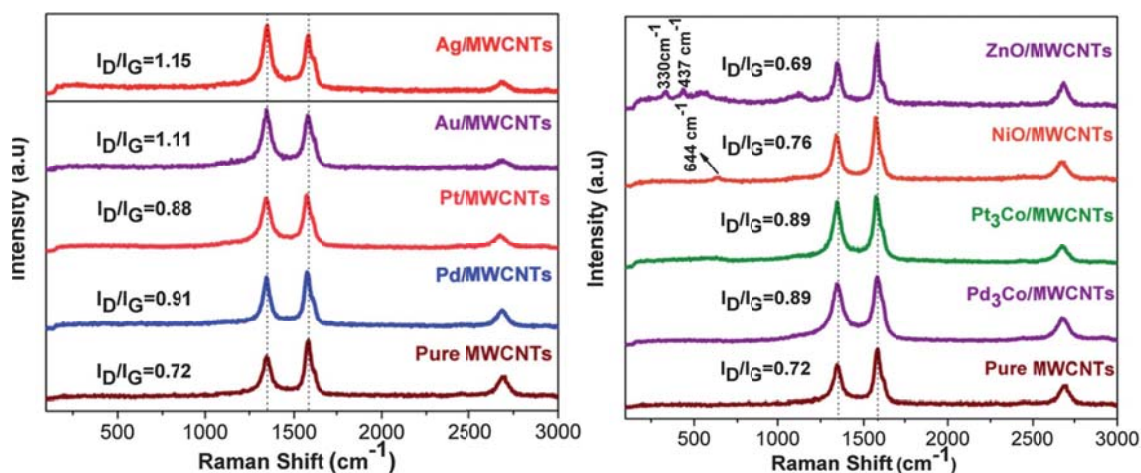


Figure 5. The Raman spectra of pure MWCNTs and different metal-, alloy-, metal oxide semiconductor-decorated MWCNTs [21]. (Reproduced from [21] with permission of The Royal Society of Chemistry).

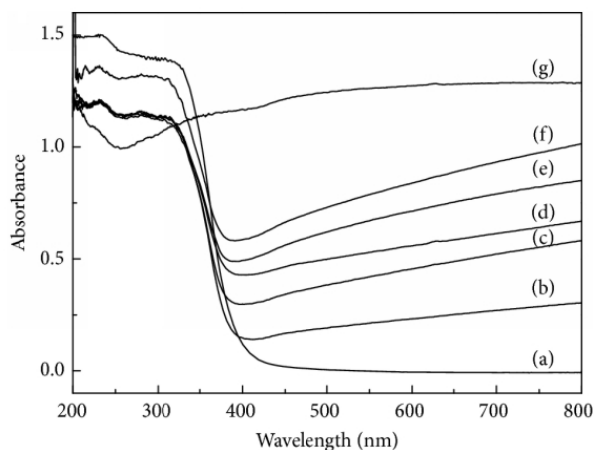


Figure 6. DRS patterns of MWCNT, TiO₂, and MWCNT-TiO₂ with different MWCNT content. (a) TiO₂; (b) 1.25 wt%; (c) 2.5 wt%; (d) 5 wt%; (e) 10 wt%; (f) 20 wt%; (g) MWCNT. (Reproduced from [63] with permission of Hindawi Publishing Corporation. Copyright © 2014 Ke Dai et al.).

The optical properties of CNT-based hybrid materials are also investigated [5, 15, 28, 33, 35, 41]. P.V. Kamat et al. measured the photoluminescence spectra and the time-integrated photoluminescence intensity of ZnO nanoparticles in solution with different CNT concentrations [33]. P.V. Kamat et al. observed that PL intensity of ZnO nanoparticles (NPs) and relaxation/emission time decreases when CNT concentration increases. These phenomena are explained by the contacts between nanoparticles and CNT. These contacts act as bridge to transfer carriers from nanoparticles to CNT. When ZnO NPs are excited by suitable light, electron-hole pairs are created in NPs. If there is no contact with CNT, the electron-hole will recombine in very short time and emit photons (radiative recombination). But because of the contact, carriers can transfer easily from NPs to CNTs and do not participate the radiative recombination. It means that the contact acts as a non-radiative recombination channel. When the concentration of CNTs increases, the number of contacts increases and, then, increases the

contribution of non-radiative recombination and increase the number of channels participating recombination process (both radiative and non-radiative). It causes the less radiative recombination (lower PL intensity), and shorter life time of carriers (shorter relaxation or decay time). This mechanism also explained the increase of the Diffuse Reflectance Spectra (DRS) with the concentration of MWCNT concentration as shown in Figure 6.

4. CONCLUSIONS

In conclusion, the CNTs-based hybrid materials are very attractive and promising topic. By functionalized with different materials: organic, metal, semiconductor, polymer... the potential application of CNTs was widened. The large surface area of CNTs is used in biotechnology; the high mobility of carriers is used in supercapacitors; the high efficiency of light absorbing was used in photosynthesis and photocatalytic... There is still plenty work for researchers to develop applications of CNTs.

Acknowledgments. This research was supported by Hanoi University of Science and Technology (HUST) under project number T2015-268.

REFERENCES

1. Iijima S. - Helical microtubules of graphitic carbon, *Nature* **354** (1991)56-58.
2. Yost A.L., Shahsavari S., Bradwell G.M., Polak R., Fachin F., Cohen R.E., McKinley G.H., Toner M., Rubner M.F., Wardle B.L. - Layer-by-layer functionalized carbon nanotube arrays: a versatile microfluidic platform for biodetection, *Microsystems & Nanoengineering* **1** (2015) 15037-15043.
3. Giraldo J.P., Landry M.P., Faltermeier S.M., McNicholas T.P., Iverson N.M., Boghossian A. A., Reuel N.F., Hilmer A.J., Sen F., Brew J.A., Strano M.S. - Plant nanobionics approach to augment photosynthesis and biochemical sensing, *Nature materials* **13** (2014) 400-408.
4. Stoner B. R., Brown B., Glass J.T. - Selected topics on the synthesis, properties and applications of multiwalled carbon nanotubes, *Diamond & Related Materials* **42** (2014) 49-57.
5. Wildgoose G. G., Banks C. E. and Compton R. G. - Metal Nanoparticles and Related Materials Supported on Carbon Nanotubes: Methods and Applications, *Functionalized Carbon Nanotubes* **2** (2) (Small 2006) 182-193.
6. Georgakilas V., Gournis D., Tzitzios V., Pasquato L., Guldi D. M., Prato M.- Decorating carbon nanotubes with metal or semiconductor nanoparticles. *J. Mater. Chem.* **17** (2007) 2679-2694.
7. Zhang W. D., Xu B., Jiang L. C. - Functional hybrid materials based on carbon nanotubes and metal oxides. *J. Mater. Chem.* **20** (2010) 6383-6391.
8. Jesús E. C, Li J. and Cabrera C. R. - Latest advances in modified/functionalized carbon nanotube-based gas sensors. Chapter 15, *Syntheses and applications of carbon nanotubes and their composites*, Satoru Suzuki, InTech, ISBN 978-953-51-1125-2, 2013, pp 337.
9. Bell J. M., Goh R.G.S., Waclawik E. R., Giulianini M. and Motta N. - Polymer-carbon nanotube composites: basics science and applications, *Materials forum* **32** (2008) 144-152.

10. Phan N. M., Bui H. T., Nguyen M. H. and Phan H. K. - Carbon-nanotube-based liquids: a new class of nanomaterials and their applications, *Adv. Nat. Sci.: Nanosci. Nanotechnol.* **5** (2014) 015014-015018.
11. Oktaviano H. S., Yamada K., Waki K. - Nano-drilled multiwalled carbon nanotubes: characterizations and application for LIB anode materials, *J. Mater. Chem.* **22** (2012) 25167.
12. Arash B., Wang Q., Varadan V. K. - Mechanical properties of carbon nanotube/polymer composites, *Scientific reports* **4**:6479 (2014) 1-8.
13. Llobet E. - Gas sensors using carbon nanomaterials: A review, *Sensors and Actuators B* **179** (2013) 32-45.
14. Parker C. B., Raut A. S., Brown B., Stoner B. R., Glass J. T. - Three-dimensional arrays of graphenated carbon nanotubes, *J. Mater. Res.* **27** (7) (2012) 1046-1053.
15. Yu K., Lu G., Bo Z., Mao S., Chen J. - Carbon nanotube with chemically bonded grapheme leaves for electronic and optoelectronics applications, *J. Phys. Chem. Lett.* **2** (2011) 1556-1562.
16. Guo Z., Wang J., Wang F., Zhou D. D., Xia Y., Wang Y. - Leaf-like grapheme oxide with a carbon nanotube midrib and its application in energy storage devices, *Adv. Fuct. Mater.* **23** (2013) 4840-4846.
17. Stoner B. R., Raut A. S., Brown B., Parker C. B., and Glass J. T. - Graphenated carbon nanotubes for enhanced electrochemical double layer capacitor performance, *Appl. Phys. Lett.* **99** (2011) 183104.
18. Zhu Z., Ning G., Fan Z., Gao J., Xu C., Qian W., Wei F. - One-step synthesis of a grapheme-carbon nanotube hybrid decorated by magnetic nanoparticles, *Carbon* **50** (2012) 2764-2771.
19. Kordas K., Toth G., Moilanen P., Kumpumaki M., Vahakangas J., Uusimaki A., Vajtai R., Ajayan P. M. - Chip cooling with integrated carbon nanotube microfin architectures, *Appl. Phys. Lett.* **90** (2007) 123105.
20. Fu Y., Nabiollahi N., Wang T., Wang S., Hu Z., Carlberg B., Zhang Y., Wang X. and Liu J. - A complete carbon-nanotube-based on-chip cooling solution with very high heat dissipation capacity, *Nanotechnology* **23** (2012) 045304.
21. Baro M., Nayak P., Baby T. T., Ramaprabhu S. - Green approach for the large-scale synthesis of metal/metal oxide nanoparticle decorated multiwalled carbon nanotubes, *Jour. Mater. Chem. A* **1** (2013) 482-486.
22. Kim S. J., Park Y. U., Ra E. J., Kim K. K., An K. H., Lee Y. H., Choi J. Y., Park C. H., Doo S. K., Park M. H. and Yang C. W. - Defect-induced loading of Pt nanoparticles on carbon nanotubes, *Appl. Phys. Lett.* **90** (2007) 023114.
23. Claramunt S., Monereo O., Boix M., Leghrib R., Prades J. D., Cornet A., Merino P., Merino C., Cirera C. - Flexible gas sensor array with an embedded heater based on metal decorated carbon nanofibres, *Sensors and Actuators B* **187** (2013) 401-406.
24. Guerra J., Herrero M. A. - Hybrid materials based on Pd nanoparticles on carbon nanostructures for environmentally benign C-C coupling chemistry, *Nanoscale* **2** (2010) 1390-1400.
25. Baccar H., Thamri A., Clement P., Llobet E. and Abdelghani A. - Pt- and Pd-decorated MWCNTs for vapour and gas detection at room temperature, *Beilstein J. Nanotechnol.* **6** (2015) 919-927.

26. Han M., Jung D., Lee G. S. - Palladium-nanoparticle-coated carbon nanotube gas sensor, *Chem. Phys. Lett.* **610-611** (2014) 261-266.
27. Lich N.Q., Thanh T.P., Truong D.V., Kien. P.T., Tu N.C., Bac L.H., Vuong D.D., Chien N.D., Lam N.H. – Pt- and Ag-Decorated Carbon Nanotube Network Layers for Enhanced NH₃ Gas Sensitivity at Room Temperature, *Materials Transactions* 56 (9) (2015) 1399-1402.
28. Lin Z. D., Young S. J., Hsiao C. H., Chang S. J. - Adsorption sensitivity of Ag-decorated carbon nanotubes toward gas-phase compounds, *Sensors and Actuators B* **188** (2013) 1230-1234.
29. Lee S. K., Chang D., Kim S. W. - Gas sensors based on carbon nanoflake/tin oxide composites for ammonia detection, *Journal of Hazardous Materials* **268** (2014) 110-114.
30. Sharma S., Islam S. S. - Phase transformation-dependent sensing performance of multi-walled carbon nanotube-alumina nanocomposite-based gas sensors, *Materials Science in Semiconductor Processing* **27** (2014) 63-70.
31. Tulliani J. M., Cavalieri A., Musso S., Sardella E., Geobaldo F. - Room temperature ammonia sensors based on zinc oxide and functionalized graphite and multi-walled carbon nanotubes, *Sensors and Actuators B* **152** (2011) 144-154.
32. Mendoza F., Hernandez D. M., Makarov V., Febus E., Weiner B. R., Morell G. - Room temperature gas sensor based on tin dioxide-carbon nanotubes composite films, *Sensors and Actuators B* **190** (2014) 227-233.
33. Vietmeyer F., Seger B. and Kamat P. V. - Anchoring ZnO particles on functionalized single wall carbon nanotubes. Excited state interactions and charge collection, *Adv. Mater.* **19** (2007) 2935-2940.
34. Hafaiedh I., Elleuch W., Clement P., Llobet E., Abdelghani A. - Multi-walled carbon nanotubes for volatile organic compound detection, *Sensors and Actuators B* **182** (2013) 344-350.
35. Jung D., Han M., Lee G. S. - Gas-sensing properties of multi-walled carbon-nanotube sheet coated with NiO, *Carbon* **78** (2014) 156-163.
36. Hieu N. V., Thuy L.B., Chien N.D. - Highly sensitive thin film NH₃ gas sensor operating at room temperature based on SnO₂/MWCNTs composite, *Sensors and Actuators B* **129** (2008) 888-895.
37. Koós A. A., Nicholls R. J., Dillon F., Kertesz K., Biro L. P., Crossley A., Grobert N. - Tailoring gas sensing properties of multi-walled carbon nanotubes by in situ modification with Si, P, and N, *Carbon* **50** (2012) 2816-2823.
38. Li W., Gao C., Qian H., Ren J. and Yan D. - Multiamino-functionalized carbon nanotubes and their applications in loading quantum dots and magnetic nanoparticles, *J. Mater. Chem.* **16** (2006) 1852-1859.
39. Unalan H. E., Hiralal P., Kuo D., Parekh B., Amaratunga G. and Chhowalla M. - Flexible organic photovoltaics from zinc oxide nanowires grown on transparent and conducting single walled carbon nanotube thin films, *J. Mater. Chem.* **18** (2008) 5909-5912.
40. Chaudhary S., Kim J. H., Singh K. V. and Ozkan M. - Fluorescence microscopy visualization of single-walled carbon nanotubes using semiconductor nanocrystals, *Nanoletters* **4** (12) (2004) 2415-2419.
41. Gao B., Chen G. Z., Puma G. L. - Carbon nanotubes/titanium dioxide (CNTs/TiO₂) nanocomposites prepared by conventional and novel surfactant wrapping sol-gel methods

- exhibiting enhanced photocatalytic activity, *Applied Catalysis B: Environmental* **89** (2009) 503-509.
42. Eder D., Windle A. H. - Morphology control of CNT-TiO₂ hybrid materials and rutile nanotubes, *Journal of Materials Chemistry* **18** (2008) 2036-2043.
 43. Yao Y., Li G., Ciston S., Lueptow R. M., Gray K. A. - Photoreactive TiO₂/Carbon nanotube composites: synthesis and reactivity, *Environmental science and technology* **42** (13) (2008) 4952-4957.
 44. Németh Z., Dieker C., Kukovecz Á., Alexander D., Forró L., Seo J. W., Hernadi K.- Preparation of homogeneous titania coating on the surface of MWNT, *Composites Science and Technology* **71** (2011) 87-94.
 45. Réti B., Németh K., Németh Z., Mogyorósi K., Markó K., Erdőhelyi A., Dombi A., Hernadi K., - Photocatalytic measurements of TiO₂/MWCNT catalysts having different surface coverage, *Physica Status Solidi B* **248** (11) (2011) 2475-2479.
 46. Sampaio M. J., Marques R. R. N., Tavares P. B., Faria J. L., Silva A. M. T., Silva C. G.- Tailoring the properties of immobilized titanium dioxide/carbon nanotube composites for photocatalytic water treatment, *Journal of Environmental Chemical Engineering* **1** (4) (2013) 945-953.
 47. Li Z., Gao B., Chen G. Z., Mokaya R., Sotiropoulos S., Puma G. L.- Carbon nanotube/titanium dioxide (CNT/TiO₂) core-shell nanocomposites with tailored shell thickness, CNT content and photocatalytic/photoelectrocatalytic properties, *Applied Catalysis B: Environmental* **110** (2011) 50-57.
 48. Li S., Zhao Z., Huang Y., Di J., Jia Y. (Alec), Zheng H. - Hierarchically structured WO₃-CNT@TiO₂ NS (nanosheets) composite with the enhanced photocatalytic activity, *Journal of Materials Chemistry A* **3** (2015) 5467-5473.
 49. Bittencourt C., Felten A., Espinosa E. H., Ionescu R., Moreau N., Heszler P., Granqvist C. G., Pireaux J.-J., Llobet E.- Evaporation of WO₃ on carbon nanotube films: a new hybrid film, *Smart materials and structures* **15** (2006) 1555-1560.
 50. Hashishin Ta., Tamaki J. - Conductivity-type sensor based on CNT-WO₃ composite for NO₂ detection, *Journal of nanomaterials* **2008** (ID 352854) (2008) 1-4.
 51. Wang S., Shi X., Shao G., Duan X., Yang H., Wang T.- Preparation, characterization and photocatalytic activity of multi-walled carbon nanotube-supported tungsten trioxide composites, *Journal of Physics and Chemistry of solids* **69** (2008) 2396-2400.
 52. Vass A., Berki P., Nemeth Z., Reti B., Hernadi K.- Preparation and characterization of multiwalled carbon nanotube/WO₃ composite materials, *Physica Status Solidi B* **250** (12) (2013) 2554-2558.
 53. Wongshoosuk C., Wisitsoraat A., Phokharatkul D., Tuantranont A., Kerdcharoen T. - Multi-walled carbon nanotube-doped tungsten oxide thin films for hydrogen gas sensing, *Sensors* **10** (2010) 7705-7715.
 54. Sun P., Deng Z., Yang P., Yu X., Chen Y., Liang Z., Meng H., Xie W., Tan S., Mai W. - Freestanding CNT-WO₃ hybrid electrodes for flexible asymmetric supercapacitors, *Journal of Materials Chemistry A* **3** (2015) 12076-12080.
 55. Barquinha P., Pereira S., Pereira L., Wojcik P., Grey P., Martins R., Fortunato E. - Flexible and transparent WO₃ transistor with electrical and optical modulation. *Advanced electronic materials* **1** (5) (2015) 150030-150036.

56. Vamvasakis I., Georgaki I., Vernardou D., Kenanakis G., Katsarakis N. - Synthesis of WO₃ catalytic powders: evaluation of photocatalytic activity under NUV/visible light irradiation and alkaline reaction pH, *Journal of Sol-Gel Science and Technology*, **6** (2015) 120-128.
57. Janotti A., Van de Walle C.G. - Fundamental of zinc oxide as a semiconductor, *Rep. Prog. Phys.* **72** (12) (2009) 126501-126529.
58. Arya S. K., Saha S., Ramirez-Vick J. E., Gupta V., Bhansali S., Singh S. P. - Review: recent advances in ZnO nanostructures and thin films for biosensor applications: Review, *Analytica Chimica Acta* **737** (2012) 1-21.
59. Stadler A. - Transparent Conducting Oxides – An up-to-date overview, *Materials*, **5** (2012) 661-683.
60. Green M. L., Takeuchi I., Hattrick-Simpers J. R. - Applications of high throughput (combinatorial) methodologies to electronic, magnetic, optical, and energy-related materials, *Journal of Applied Physics* **113** (2013) 231101-231123.
61. Wang J., Sun X.W., Jiao Z. - Application of nanostructures in electrochromic materials and devices, *Materials* **3** (2010) 5029-5053.
62. Gondal M. A., Dastageer M. A., Khalil A. - Synthesis of nano-WO₃ and its catalytic activity for enhanced antimicrobial process for water purification using laser induced photo-catalysis, *Catalysis communications* **11** (2009) 214-219.
63. Dai K., Zhang X., Fan K., Zeng P., and Peng T., Multiwalled Carbon Nanotube-TiO₂ Nanocomposite for Visible-Light-Induced Photocatalytic Hydrogen Evolution, *Journal of Nanomaterials* **2014** (ID 694073) (2014) 1-8.

TÓM TẮT

BÀI BÁO TỔNG QUAN: VẬT LIỆU LAI HÓA DỰA TRÊN NỀN ỐNG NANÔ CÁC BÓN

Nguyễn Công Tú*, Nguyễn Hữu Lâm

Viện Vật lý kỹ thuật, Trường Đại học Bách khoa Hà Nội, Số 1, Đại Cồ Việt, Hà Nội

Email: tu.nguyencong@hust.edu.vn

Vật liệu lai hóa và vật liệu composit dựa trên nền ống nanô cacbon đang là một hướng nghiên cứu thu hút được nhiều sự quan tâm của các nhà khoa học trên thế giới. Ống nanô cacbon được chức năng hóa hay được lai hóa với cả các hợp chất hữu cơ và vô cơ cho các ứng dụng khác nhau. Vật liệu lai hóa có thể được tổng hợp bằng phương pháp trực tiếp hay gián tiếp. Một số nghiên cứu về tính chất điện, tính chất quang và tính chất quang xúc tác của vật liệu lai hóa sẽ được thảo luận trong bài báo.

Từ khóa: CNT, vật liệu lai hóa, bán dẫn ôxít kim loại.